

DEPARTMENT OF REGULATORY AND ECONOMIC RESOURCES (RER) BOARD AND CODE ADMINISTRATION DIVISION

MIAMI-DADE COUNTY PRODUCT CONTROL SECTION 11805 SW 26 Street, Room 208 Miami, Florida 33175-2474 T (786) 315-2590 F (786) 315-2599 www.miamidade.gov/building

NOTICE OF ACCEPTANCE (NOA)

Florida Window Systems, Corp. 6860 NW 75 Street Medley, FL 33166

Scope:

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami–Dade County RER–Product Control Section to be used in Miami–Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami–Dade County Product Control Section (In Miami–Dade County) and/ or the AHJ (in areas other than Miami–Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. RER reserves the right to revoke this acceptance if it is determined by Miami–Dade County Product Control Section that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein and has been designed to comply with the Florida Building Code, including the High Velocity Hurricane Zone.

DESCRIPTION: Series "FWS-300" Aluminum Horizontal Sliding Window – L.M.I.

APPROVAL DOCUMENT: Drawing No. **W07-80**, titled "Series FWS-300 Alum Horiz. Sliding Wdw. (L.M.I.)", sheets 1 through 7 of 7, dated 10/15/07, with revision **F** dated 07/13/23, prepared by Al-Farooq Corporation, signed and sealed by Jalal Farooq, P.E., bearing the Miami-Dade County Product Control Renewal stamp with the Notice of Acceptance number and expiration date by the Miami-Dade County Product Control Section.

MISSILE IMPACT RATING: Large and Small Missile Impact Resistant

LABELING: Each unit shall bear a permanent label with the manufacturer's name or logo, city, state, model/series, and following statement: "Miami-Dade County Product Control Approved", unless otherwise noted herein.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/ or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami–Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA renews NOA No. 23-0928.27 and consists of this page 1 and evidence pages E-1, E-2 and E-3, as well as approval document mentioned above.

The submitted documentation was reviewed by Manuel Perez, P.E.



5/7/24

NOA No. 24-0417.02 Expiration Date: May 01, 2025 Approval Date: May 16, 2024 Page 1

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

1. EVIDENCE SUBMITTED UNDER PREVIOUS NOA's

A. DRAWINGS

- 1. Manufacturer's die drawings and sections. (Submitted under NOA No. 07-1025.09)
- 2. Drawing No **W07-80**, titled "Series FWS-300 Alum Horiz. Sliding Wdw. (L.M.I.)", sheets 1 through 7 of 7, dated 10/15/07, with revision F dated 07/13/23, prepared by Al-Farooq Corporation, signed and sealed by Jalal Farooq, P.E. (Submitted under NOA No. 23-0928.27)

B. TESTS

1. Test reports on: 1) Large Missile Impact Test per FBC, TAS 201-94
2) Cyclic Wind Pressure Loading per FBC, TAS 203-94
along with marked-up drawings and installation diagram of an aluminum horizontal sliding window, prepared by Hurricane Engineering & Testing, Inc., Test Reports No. HETI-07-4417 and HETI-05-1944, dated 12/13/07, signed and sealed by Candido F. Font, P.E.

(Submitted under NOA No. 07-1025.09)

- 2. Test reports on: 1) Air Infiltration Test, per FBC, TAS 202-94
 - 2) Uniform Static Air Pressure Test, Loading per FBC TAS 202-94
 - 3) Water Resistance Test, per FBC, TAS 202-94
 - 4) Forced Entry Test, per FBC 2411 3.2.1, TAS 202-94

along with marked-up drawings and installation diagram of an aluminum horizontal sliding window, prepared by Hurricane Engineering & Testing, Inc., Test Report No. **HETI-05-1439**, dated 12/13/07, signed and sealed by Candido F. Font, P.E. (Submitted under NOA No. 07-1025.09)

C. CALCULATIONS

- 1. Anchor verification complying with **FBC** 7th **Edition (2020)**, dated 10/26/20, prepared by Al-Farooq Corporation, signed and sealed by Jalal Farooq, P.E. (Submitted under NOA No. 20-1202.10)
- 2. Glazing complies with ASTM E1300-09

D. QUALITY ASSURANCE

1. Miami-Dade Department of Regulatory and Economic Resources (RER)

Manuel Perez, P.E.
Product Control Examiner
NOA No. 24-0417.02
Expiration Date: May 01.2025

Approval Date: May 16, 2024

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

- 1. EVIDENCE SUBMITTED UNDER PREVIOUS NOA'S (CONTINUED)
- E. MATERIAL CERTIFICATIONS
 - 1. Notice of Acceptance No. 22-1130.05 issued to Eastman Chemical Company (MA) for their "Saflex Storm Saflex and Saflex HP Composite Glass Interlayers with PET Core" dated 01/26/23, expiring on 12/11/28.
 - 2. Notice of Acceptance No. 21-0216.01 issued to Eastman Chemical Company (MA) for their "Saflex PVB Interlayers Clear and Colored for Glass" dated 04/29/21, expiring on 05/21/26.

F. STATEMENTS

- 1. Statement letter of conformance, complying with FBC 7th Edition (2020), with FBC 8th Edition (2023) and of no financial interest, dated July 18, 2023, issued by Al-Farooq Corporation, signed and sealed by Jalal Farooq, P.E. (Submitted under NOA No. 23-0928.27)
- 2. Letter from Al-Farooq Corporation requesting a 1-year extension to allow manufacturer time to perform verification test, dated January 12, 2023, signed by Jalal Farooq, P.E., CFO.
 - (Submitted under NOA No. 23-0203.02)
- 3. Testing agreement letter dated January 30, 2023, between Hurricane Engineering & Testing Inc. (HETI) and Pino's Window Corp, issued by HETI and signed by Syed Waqar Ali, Ph.D., President.

 (Submitted under NOA No. 23-0203.02)

G. OTHERS

1. Notice of Acceptance No. 23-0203.02, issued to Florida Window Systems, Corp., for their Series "FWS-300" Aluminum Horizontal Sliding Window – L.M.I., approved on 02/16/23 and expiring on 05/01/24.

Manuel Perez, P.E.
Product Control Examiner
NOA No. 24-0417.02
Expiration Date: May 01, 2025

Approval Date: May 16, 2024

Florida Window Systems, Corp.

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

2. NEW EVIDENCE SUBMITTED

A. DRAWINGS

1. None.

B. TESTS

1. None.

C. CALCULATIONS

1. None.

D. **OUALITY ASSURANCE**

1. Miami-Dade Department of Regulatory and Economic Resources (RER)

E. MATERIAL CERTIFICATIONS

- 1. Notice of Acceptance No. 23-0713.21 issued to Eastman Chemical Company (MA) for their "Saflex® Storm Saflex® and Saflex® HP Composite Interlayers with PET Core Laminated Glass" dated 08/17/23, expiring on 12/11/28.
- 2. Notice of Acceptance No. 23-0713.18 issued to Eastman Chemical Company (MA) for their "Saflex® PVB Clear and Colored Interlayers for Laminated Glass" dated 08/17/23, expiring on 05/21/26.

F. STATEMENTS


- 1. Statement letter of conformance, complying with **FBC 8th Edition (2023)** and of no financial interest, dated April 16, 2024, issued by Al-Farooq Corporation, signed and sealed by Jalal Farooq, P.E.
- 2. Letter from consultant requesting a 1-year extension to allow time to perform verification test, dated 04/15/24 issued by Al-Farooq Corporation, signed and sealed by Jalal Farooq, P.E.
- 3. Testing agreement letter dated 05/01/24 between Florida Window Systems Corp. and Hurricane Engineering & Testing Inc., issued by HETI and signed by Dr. Syed Waqar Ali, Ph.D., President.

G. OTHERS

- 1. Notice of Acceptance No. 23-0928.27, issued to Florida Window Systems, Corp., for their Series "FWS-300" Aluminum Horizontal Sliding Window L.M.I., approved on 11/09/23 and expiring on 05/01/24.
- 2. This is a one-year approval, subjected to successful verification test, the final approval will be issued for a total of 5 years.

Manuel Perez, P.E. Product Control Examiner NOA No. 24-0417.02

Expiration Date: May 01, 2025 Approval Date: May 16, 2024

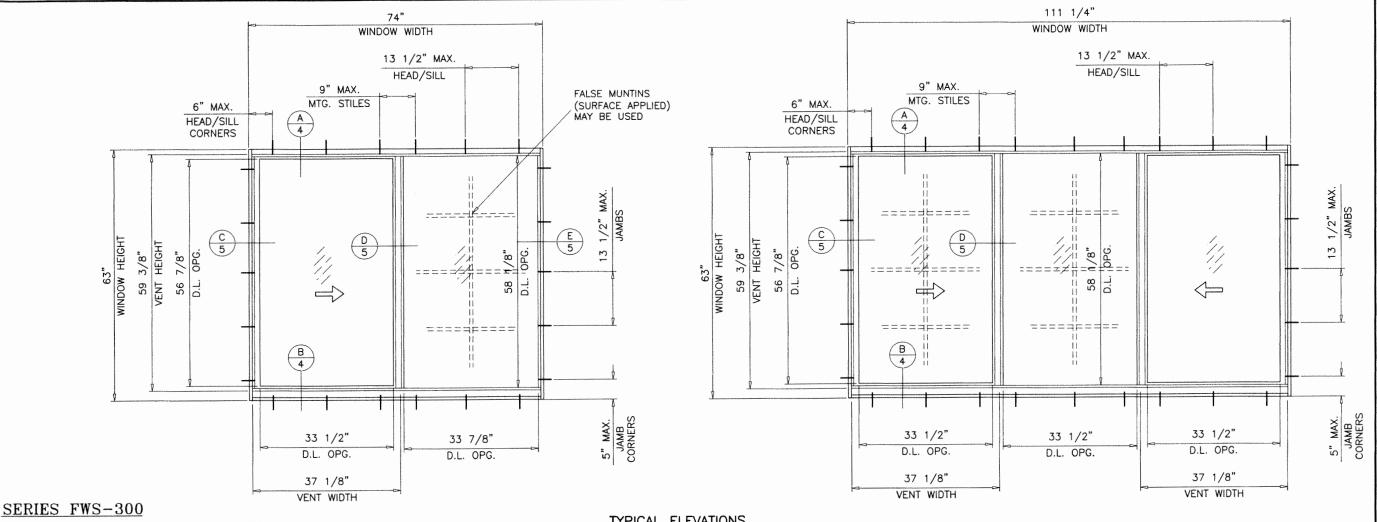

ALUMINUM HORIZONTAL SLIDING WINDOW

DESIGN LOAD RATINGS FOR THESE WINDOWS TO BE AS PER CHARTS SHOWN ON SHEETS 2 & 3.

APPROVAL APPLIES TO SINGLE UNITS OR SIDE BY SIDE COMBINATIONS OF H.S./H.S. OR HORIZONTAL SLIDING WITH OTHER WINDOW TYPES IN MODULES OF TWO OR MORE WINDOWS USING MIAMI-DADE COUNTY APPROVED MULLIONS IN BETWEEN. LOWER DESIGN PRESSURE FROM WINDOWS OR MULLION APPROVAL WILL APPLY TO ENTIRE SYSTEM.

THIS PRODUCT HAS BEEN DESIGNED AND TESTED TO COMPLY WITH THE REQUIREMENTS OF THE 2020 (7TH EDITION)/2023 (8TH EDITION) FLORIDA BUILDING CODE INCLUDING HIGH VELOCITY HURRICANE ZONE (HVHZ).

1BY OR 2BY WOOD BUCKS & BUCK FASTENERS BY OTHERS, MUST BE DESIGNED AND INSTALLED ADEQUATELY TO TRANSFER APPLIED PRODUCT LOADS TO THE BUILDING STRUCTURE.

ANCHORS SHALL BE CORROSION RESISTANT, SPACED AS SHOWN ON DETAILS AND INSTALLED PER MANUF'S INSTRUCTIONS. SPECIFIED EMBEDMENT TO BASE MATERIAL SHALL BE BEYOND WALL DRESSING OR STUCCO.

A LOAD DURATION INCREASE IS USED IN DESIGN OF ANCHORS INTO WOOD ONLY.

ALL SHIMS TO BE HIGH IMPACT, NON-METALLIC AND NON-COMPRESSIBLE.

MATERIALS INCLUDING BUT NOT LIMITED TO STEEL/METAL SCREWS, THAT COME INTO CONTACT WITH OTHER DISSIMILAR MATERIALS SHALL MEET THE REQUIREMENTS OF THE 2020/2023 FLORIDA BLDG. CODE & ADOPTED STANDARDS.

THIS PRODUCT APPROVAL IS GENERIC AND DOES NOT PROVIDE INFORMATION FOR A SITE SPECIFIC PROJECT, i.e. LIFE SAFETY OF THIS PRODUCT, ADEQUACY OF STRUCTURE RECEIVING THIS PRODUCT AND SEALING AROUND OPENING FOR WATER INFILTRATION RESISTANCE ETC. CONDITIONS NOT SHOWN IN THIS DRAWING ARE TO BE ANALYZED SEPARATELY,

AND TO BE REVIEWED BY BUILDING OFFICIAL.

DESIGN LOADS SHOWN ARE BASED ON 'ALLOWABLE STRESS DESIGN (ASD)'

TYPICAL ELEVATIONS


PRODUCT RENEWED as complying with the Florida Building Code NOA-No. 24-0417.02 **Expiration Date: 05/01/2025**

Miami-Dade Product Control

PRODUCT REVISED As complying with the Florida Building Code

NOA-No. 23-0928.27 Expiration Date: 05/01/2024

By: Manuel Peres Miami-Dade Product Control

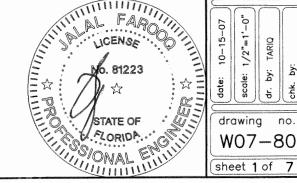

date: 10-15-07		scale: 1/2"=1'-0"		dr. by: TARIQ		chk. by:
وف	ိုင	O	۵	ш	L	y
evisions.	no date	C 12.30.15	D 01.16.18	E 11.05.20	F 07.13.23	
	þ					
	by description	REV. PER RER COMMENTS	UPDATED TO 2017 FBC	UPDATED TO 2020 FBC	UPDATED TO 2023 FBC	
		MMENTS	FBC	FBC	FBC	

drawing no.

W07 - 80

AL-FAROOQ CORPORATION
ENGINEERS & PRODUCT DEVELOPMENT
9360 SUNSET DRIVE, SUITE 220
MIAMI, FLORIDA 33173 (C.A.N. 3538)
TEL. (305) 264-8100 FAX. (305) 262-6978

(L.M.I.) CORP.

WDW.

SERIES FWS-300 ALUM HORIZ.

77 TERRACE 5-9420

FLORIDA WINDOW 5 7191 N.W. 77 TERRA MEDLEY, FL. 33166 TEL. (305) 805-9420 F


805

JUL 19 2023

THESE WINDOWS ARE RATED FOR LARGE & SMALL MISSILE IMPACT. SHUTTERS ARE NOT REQUIRED.

DESIGN LOAD CAPACITY - PSF (XO OR OX SIZES)										
			GLASS TYPE 'A' WITHOUT REINFORCING			GLASS TYPE 'B' WITH REINFORCING				
WINDO	W DIMS.				WITH SHE					
WIDTH	HEIGHT	A	EXT.(+)	INT.(-)	EXT.(+)	INT.(-)	EXT.(+)	INT.(-)	EXT.(+)	INT.(-)
26-1/2"		4	66.7	75.0	66.7	75.0	80.0	100.0	80.0	100.0
37"	26"	4	66.7	75.0	66.7	75.0	80.0	100.0	80.0	100.0
53-1/8"	(3)	6	66.7	75.0	66.7	75.0	80.0	100.0	80.0	100.0
74"		6	66.7	75.0	66.7	75.0	80.0	100.0	80.0	100.0
26-1/2"		4	66.7	75.0	66.7	75.0	80.0	100.0	80.0	100.0
37"	38-3/8"	4	66.7	75.0	66.7	75.0	80.0	100.0	80.0	100.0
53-1/8"	(4)	6	66.7	75.0	66.7	75.0	80.0	100.0	80.0	100.0
74"		6	66.7	75.0	66.7	75.0	80.0	82.1	80.0	100.0
26-1/2"		4	66.7	75.0	66.7	75.0	80.0	100.0	80.0	100.0
37"	50-5/8"	4	66.7	75.0	66.7	75.0	80.0	82.8	80.0	100.0
53-1/8"	(5)	6	64.5	64.5	66.7	75.0	64.5	64.5	80.0	100.0
74"		6	54.9	54.9	66.7	75.0	54.9	54.9	80.0	100.0
26-1/2"		4	66.7	75.0	66.7	75.0	80.0	82.6	80.0	100.0
37"	63"	4	62.3	62.3	66.7	75.0	62.3	62.3	80.0	100.0
53"	(5)	6	47.2	47.2	66.7	75.0	47.2	47.2	80.0	88.7
74"		6	38.2	38.2	66.7	70.1	38.2	38.2	71.8	71.8
24"		4	66.7	75.0	66.7	75.0	80.0	100.0	80.0	100.0
36"	_	4	66.7	75.0	66.7	75.0	80.0	100.0	80.0	100.0
48"	24"	4	66.7	75.0	66.7	75.0	80.0	100.0	80.0	100.0
60"	(3)	6	66.7	75.0	66.7	75.0	80.0	100.0	80.0	100.0
72"		6	66.7	75.0	66.7	75.0	80.0	100.0	80.0	100.0
24"		4	66.7	75.0	66.7	75.0	80.0	100.0	80.0	100.0
36"		4	66.7	75.0	66.7	75.0	80.0	100.0	80.0	100.0
48"	36"	4	66.7	75.0	66.7	75.0	80.0	100.0	80.0	100.0
60"	(3)	6	66.7	75.0	66.7	75.0	80.0	100.0	80.0	100.0
72"		6	66.7	75.0	66.7	75.0	80.0	88.9	80.0	100.0
24"		4	66.7	75.0	66.7	75.0	80.0	100.0	80.0	100.0
36"	_ <u>.</u> .	4	66.7	75.0	66.7	75.0	80.0	90.8	80.0	100.0
48"	48"	4	66.7	74.4	66.7	75.0	74.4	74.4	80.0	100.0
60"	(4)	6	65.6	65.6	66.7	75.0	65.6	65.6	80.0	100.0
72"		6	61.0	61.0	66.7	75.0	61.0	61.0	80.0	100.0
24"		4	66.7	75.0	66.7	75.0	80.0	95.5	80.0	100.0
36"		4	66.7	67.7	66.7	75.0	67.7	67.7	80.0	100.0
48"	60"	4	54.2	54.2	66.7	75.0	54.2	54.2	80.0	100.0
60"	(5)	6	46.5	46.5	66.7	75.0	46.5	46.5	80.0	87.5
72"		6	41.8	41.8	66.7	75.0	41.8	41.8	78.6	78.6

A = NO. OF ANCHORS PER HEAD & SILL () = NO. OF ANCHORS PER JAMB



ALL EXTERIOR(+) LOADS SHOWN ON THIS SHEET ARE FOR WINDOWS WITH APPLIED RISER AT FRAME SILL FOR STD. SILL (NO RISER) LIMIT EXTERIOR(+) LOADS TO 66.7 PSF SEE DETAIL ON SHEET 4.

GLASS CAPACITIES ON THIS SHEET ARE BASED ON ASTM E1300-09 (3 SEC. GUSTS) AND FLORIDA BUILDING COMMISSION DECLARATORY STATEMENT DCA05-DEC-219

SILICONE DOWSIL 795 SILICONE DOWSIL 795 -1/8" HEAT STREN'D GLASS -1/8" HEAT STREN'D GLASS .075" Interlayer .090" Interlayer Saflex Storm -Saflex PVB Ćlear & Color Glass Saflex & Saflex HP Composite By 'Eastman Chemical Co.' With PET Core By 'Eastman Chemical Co.' -1/8" HEAT STREN'D GLASS —1/8" HEAT STREN'D GLASS MIN. TYP. SS BITE SILICONE N. TYP. BITE SILICONE DOWSIL 795 DOWSIL 795 GLASS AT 1/4 POINTS ON LITES WIDER THAN 36" ONLY AT 1/4 POINTS ON LITES WIDER THAN 36" ONLY GLASS TYPE 'A' GLASS TYPE 'B'

GLAZING OPTIONS

PRODUCT RENEWED

as complying with the Florida Building Code NOA-No. 24-0417.02

Expiration Date: 05/01/2025

By: Manuel Pres Miami-Dade Product Control

PRODUCT REVISED As complying with the Florida Building Code NOA-No.

Expiration Date: 05/01/2024

By: Manuel Peres Miami-Dade Product Control



JUL 19 2023

AL-FAROOQ CORPORATION
ENGINEERS & PRODUCT DEVELOPMENT
9360 SUNSET DRIVE, SUITE 220
MIAMI, FLORIDA 33173 (C.A.N. 3538)
TEL. (305) 264-8100 FAX. (305) 262-6978

(L.M.I.) CORP. WDW.

805-9424

FLORIDA WINDOW SYSTEMS C 7191 N.W. 77 TERRACE MEDLEY, FL. 33166 TEL. (305) 805–9420 FAX (305) POTENTIAL

drawing no. W07-80 sheet 2 of 7

	DESIGN LOAD CAPACITY - PSF (XOX SIZES)									
			WIT	GLASS TYPE 'A' WITHOUT REINFORCING			GLASS TYPE 'B' WITH REINFORCING			
WINDO	V DIMS.	A	W/O SHE	AR CLIPS	WITH SHE	EAR CLIPS	W/O SHEAR CLIPS WITH SHEAR CL			AR CLIPS
WIDTH	HEIGHT		EXT.(+)	INT.(-)	EXT.(+)	INT.(-)	EXT.(+)	INT.(-)	EXT.(+)	INT.(-)
74"	26"	6	66.7	75.0	66.7	75.0	80.0	100.0	80.0	100.0
106-1/4"	(3)	9	66.7	75.0	66.7	75.0	80.0	100.0	80.0	100.0
111"	(-)	9	66.7	75.0	66.7	75.0	80.0	100.0	80.0	100.0
74"	38-3/8"	6	66.7	75.0	66.7	75.0	80.0	100.0	80.0	100.0
106-1/4"	(4)	9	66.7	75.0	66.7	73.6	77.5	77.5	80.0	100.0
111"	(' '	9	66.7	75.0	66.7	71.8	80.0	81.7	80.0	100.0
74"	50-5/8"	6	66.7	67.6	66.7	75.0	67.6	67.6	80.0	100.0
106-1/4"	(5)	9	55.8	55.8	66.7	75.0	55.8	55.8	80.0	100.0
111"	(0)	9	54.9	54.9	66.7	75.0	54.9	54.9	80.0	100.0
74"	0.7"	6	49.8	49.8	66.7	75.0	49.8	49.8	80.0	93.6
106-1/4"	63" (5)	9	39.1	39.1	66.7	71.9	39.1	39.1	73.6	73.6
111"	(3)	9	38.2	38.2	66.7	70.1	38.2	38.2	71.8	71.8
72"		7	66.7	75.0	66.7	75.0	80.0	100.0	80.0	100.0
84"	24"	9	66.7	75.0	66.7	75.0	80.0	100.0	80.0	100.0
96"	(3)	9	66.7	75.0	66.7	75.0	80.0	100.0	80.0	100.0
108"		9	66.7	75.0	66.7	75.0	80.0	100.0	80.0	100.0
72"		7	66.7	75.0	66.7	75.0	80.0	100.0	80.0	100.0
84"	36"	9	66.7	75.0	66.7	75.0	80.0	100.0	80.0	100.0
96"	(3)	9	66.7	75.0	66.7	75.0	80.0	92.0	80.0	100.0
108"		9	66.7	75.0	66.7	75.0	80.0	80.0	80.0	100.0
72"		7	66.7	74.4	66.7	75.0	74.4	74.4	80.0	100.0
84"	48"	9	66.7	68.0	66.7	75.0	68.0	68.0	80.0	100.0
96"	(4)	9	63.7	63.7	66.7	75.0	63.7	63.7	80.0	100.0
108"		9	61.0	61.0	66.7	75.0	61.0	61.0	80.0	100.0
72"		7	54.2	54.2	66.7	75.0	54.2	54.2	80.0	100.0
84"	60"	9	48.7	48.7	66.7	75.0	48.7	48.7	80.0	91.5
96"	(5)	9	44.7	44.7	66.7	75.0	44.7	44.7	80.0	84.1
108"		9	41.8	41.8	66.7	75.0	41.8	41.8	78.6	78.6


	Α	==	NO.	OF	ANCHORS	PER	HEAD	&	SILL
()	=	NO.	OF	ANCHORS	PER	JAMB		

(1/3W)	(1/3w)	(1/3W)
--------	--------	--------

OPERATING VENTS TO BE 1/3 OF THE WINDOW WIDTH

DESIGN LOAD CAPACITY - PSF (XOX SIZES)										
			GLASS TYPE 'A' WITHOUT REINFORCING				GLASS TYPE 'B' WITH REINFORCING			
WINDOV	V DIMS.	A			·		W/O SHE		T	
WIDTH	HEIGHT	A	EXT.(+)	INT.(-)	EXT.(+)	INT.(-)	EXT.(+)	INT.(-)	EXT.(+)	INT.(-)
74"	0.07	7	66.7	75.0	66.7	75.0	80.0	100.0	80.0	100.0
106-1/4"	26" (3)	9	66.7	75.0	66.7	75.0	80.0	100.0	80.0	100.0
111"	(3)	9	66.7	75.0	66.7	75.0	80.0	100.0	80.0	100.0
74"	70 7/0"	7	66.7	75.0	66.7	75.0	80.0	87.6	80.0	100.0
106-1/4"	38-3/8" (4)	9	66.7	75.0	66.7	73.2	80.0	92.9	80.0	100.0
111"	(4)	9	66.7	75.0	66.7	72.0	80.0	88.5	80.0	100.0
74"	50-5/8" (5)	7	66.0	66.0	66.7	75.0	66.0	66.0	80.0	100.0
74"	63" (5)	7	47.4	47.4	66.7	75.0	47.4	47.4	80.0	89.0
72"		7	66.7	75.0	66.7	75.0	80.0	100.0	80.0	100.0
84"	24"	9	66.7	75.0	66.7	75.0	80.0	100.0	80.0	100.0
96"	(3)	9	66.7	75.0	66.7	75.0	80.0	100.0	80.0	100.0
108"		9	66.7	75.0	66.7	75.0	80.0	100.0	80.0	100.0
72"		7	66.7	75.0	66.7	75.0	80.0	95.7	80.0	100.0
84"	36"	9	66.7	75.0	66.7	75.0	80.0	92.6	80.0	100.0
96"	(3)	9	66.7	75.0	66.7	75.0	80.0	80.0	80.0	100.0
108"		9	66.7	75.0	66.7	75.0	80.0	96.6	80.0	100.0
72"	40"	7	66.7	72.9	66.7	75.0	72.9	72.9	80.0	100.0
84"	48" (4)	9	66.7	68.4	66.7	75.0	68.4	68.4	80.0	100.0
96"	(1)	9	61.5	61.5	66.7	75.0	61.5	61.5	80.0	100.0
72"	60" (5)	7	51.7	51.7	66.7	75.0	51.7	51.7	80.0	97.2

A = NO. OF ANCHORS PER HEAD & SILL () = NO. OF ANCHORS PER JAMB

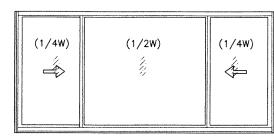

OPERATING VENTS TO BE 1/4 OF THE WINDOW WIDTH

ALL EXTERIOR(+) LOADS SHOWN ON THIS SHEET ARE FOR WINDOWS WITH APPLIED RISER AT FRAME SILL FOR STD. SILL (NO RISER) LIMIT EXTERIOR(+) LOADS TO 66.7 PSF SEE DETAIL ON SHEET 4.

GLASS CAPACITIES ON THIS SHEET ARE BASED ON ASTM E1300-09 (3 SEC. GUSTS) AND FLORIDA BUILDING COMMISSION DECLARATORY STATEMENT DCA05-DEC-219

PRODUCT RENEWED as complying with the Florida Building Code NOA-No. 24-0417.02


Expiration Date: 05/01/2025

By: Manuel Peres Miami-Dade Product Control

PRODUCT REVISED As complying with the Florida Building Code NOA-No.

Expiration Date: 05/01/2024

By: Manuel Peres Miami-Dade Product Control

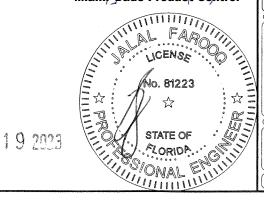

AL-FAROOQ CORPORATIONENGINEERS & PRODUCT DEVELOPMENT
9360 SUNSET DRIVE, SUITE 220
MIAMI, FLORIDA 33173 (C.A.N. 3538)
TEL. (305) 264-8100 FAX. (305) 262-6978

SERIES FWS-300 ALUM HORIZ. SLIDING WDW. (L.M.I.)

FLORIDA WINDOW SYSTEMS CORP.


7191 N.W. 77 TERRACE


MEDLEY, FL. 33166

TEL. (305) 805-9420 FAX (305) 805-9424

drawing no. W07-80 sheet 3 of 7

JUL 19 2023

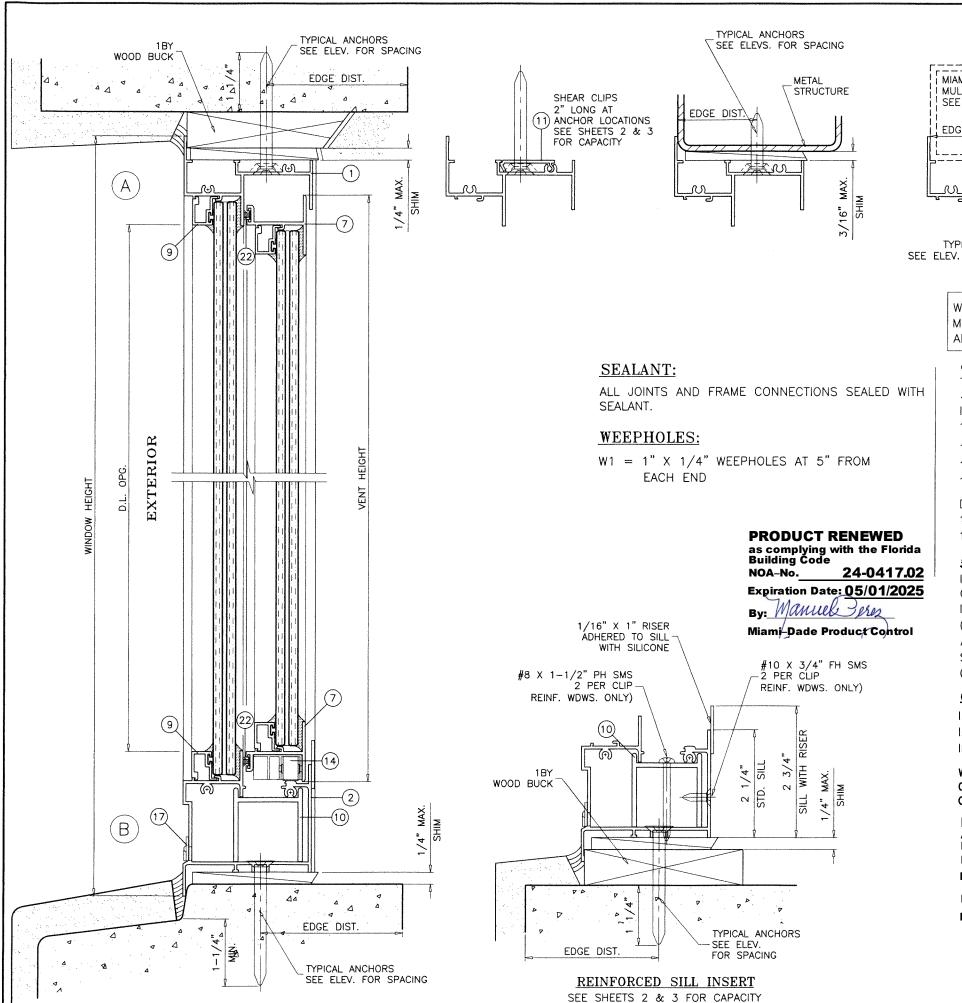

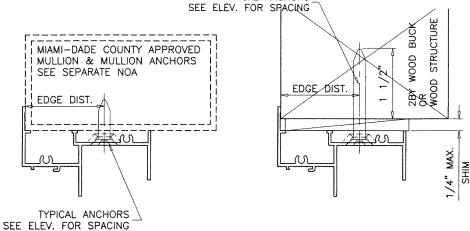

TYPICAL ANCHORS

WOOD BUCKS AND METAL STRUCTURE NOT BY 'FLORIDA WDW. SYS. MUST SUSTAIN LOADS IMPOSED BY GLAZING SYSTEM AND TRANSFER THEM TO THE BUILDING STRUCTURE.

TYPICAL ANCHORS: SEE ELEV. FOR SPACING

1/4" DIA. ULTRACON+ BY 'DEWALT' (Fu=164 KSI, Fy=148 KSI)

INTO 2BY WOOD BUCKS OR WOOD STRUCTURES

1-1/2" MIN. PENETRATION INTO WOOD (HEAD/SILL/JAMBS)

THRU 1BY BUCKS INTO CONC. OR BLOCKS

1-1/4" MIN. EMBED INTO CONCRETE (HEAD/SILL/JAMBS) 1-1/4" MIN. EMBED INTO BLOCKS (JAMBS)

DIRECTLY INTO CONCRETE OR BLOCKS

1-1/4" MIN. EMBED INTO CONCRETE (HEAD/SILL/JAMBS)

1-1/4" MIN. EMBED INTO BLOCKS (JAMBS)

#12 TEKS OR SELF-DRILLING SCREWS (GRADE 5 CRS)

INTO MIAMI-DADE COUNTY APPROVED MULLIONS

INTO METAL STRUCTURES (HEAD/SILL/JAMBS)

(3) THREADS MIN. TO EXTEND BEYOND METAL THICKNESS

ALUMINUM: 1/8" THK. MIN. (6063-T5 MIN.) STEEL: 1/8" THK. MIN. (Fy = 36 KSI MIN.)

(STEEL IN CONTACT WITH ALUMINUM TO BE PLATED OR PAINTED)

CRITICAL EDGE DISTANCE

INTO CONCRETE AND BLOCKS = 2-1/2" MIN.

INTO WOOD STRUCTURE = 1" MIN.

INTO METAL STRUCTURE = 3/4" MIN.

WOOD AT HEAD, SILL OR JAMBS SG = 0.55 MIN. CONCRETE AT HEAD, SILL OR JAMBS f'c = 3000 PSI MIN. C-90 HOLLOW/FILLED BLOCK AT JAMBS I'm = 2000 PSI MIN.

PRODUCT REVISED


As complying with the Florida Building Code

23-0928.27 NOA-No. Expiration Date: 05/01/2024

By: Manuel Peres

Miami-Dade Product Control

JUL 19 2023



AL-FAROOQ CORPORATION
ENGINEERS & PRODUCT DEVELOPMENT
9360 SUNSET DRIVE, SUITE 220
MIAMI, FLORIDA 33173 (C.A.N. 3538)


CORP. / SYSTEMS RACE SLIDING WINDOW
77 TERR.


FLORIDA WII 7191 N.W. 7 MEDLEY, FL.

description
REV. PER RER C
UPDATED TO 201
UPDATED TO 202
NO CHANGE THIS ь Б

drawing no.

W07-80 sheet 4 of 7

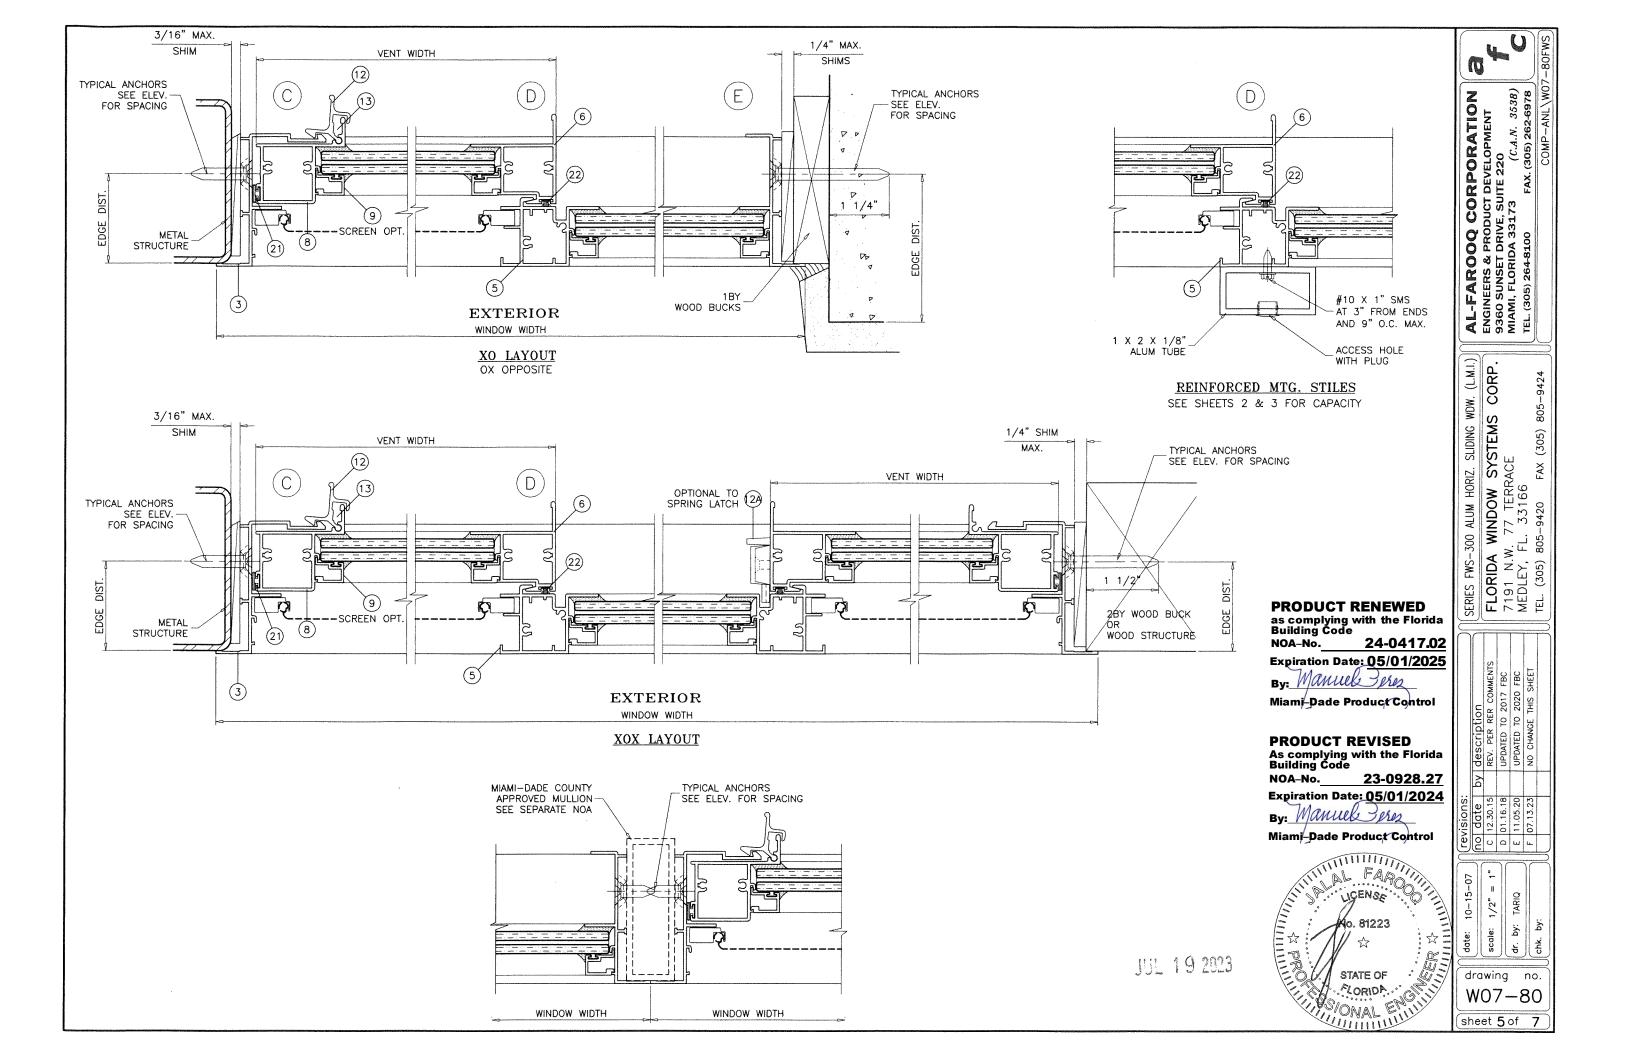

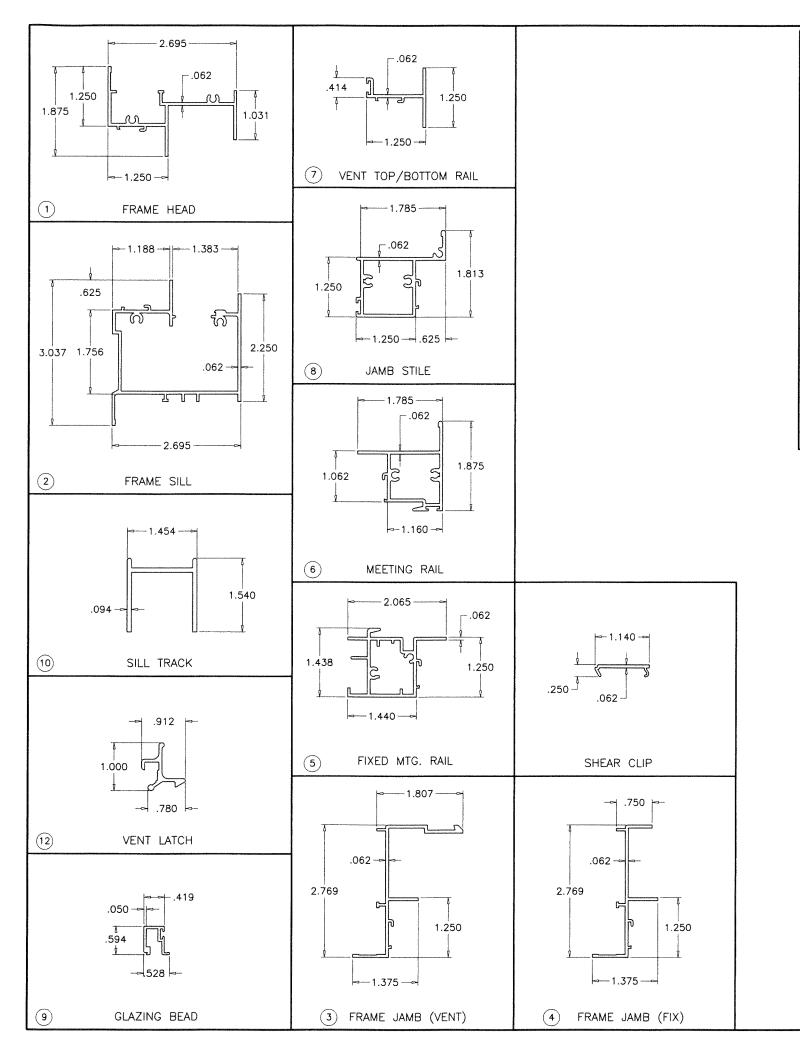

ITEM	PART #	QUANTITY	DESCRIPTION	MATERIAL	MANF./SUPPLIER/REMARKS	(
1	FWS-022	1	FRAME HEAD	6063-T6		10 J
2	FWS-026	1	FRAME SILL	6063-T6		
3	FWS-019	1	FRAME JAMB VENT	6063-T6	-	10N NT 3538) -6978 NL\WO
4	FWS-	1	FRAME JAMB FIX.	6063-T6	-	35,
5	FWS-025	1/ VENT	FIXED RAIL	6063-T5		DQ CORPORATION PRODUCT DEVELOPMENT DRIVE, SUITE 220 A 33173 (C.A.N. 3538) 100 FAX. (305) 262-6978 COMP-ANL\W07
6	FWS-024	1/ VENT	VENT MEETING RAIL	6063-T6	_	RAT OPME 0 (C.A.N. 05) 262 OMP-A
7	FWS-016	2/ VENT	TOP AND BOTTOM RAIL	6063-T5	_	22.22 (30.)
8	FWS-023	1/ VENT	JAMB STILE	6063-T5	-	ORPOF CT DEVELC SUITE 220 73 ((FAX. (30
9	FWS-029	AS REQD.	GLAZING BEAD	6063-T6	_	COF OUCT I E, SUI 173
10	FWS-015A	1	6" LONG SILL TRACK INSERT	6063-T5	AT FIXED RAILS ONLY	Q CO RODUCT RIVE, SU 33173
11	_	AS REQD.	SHEAR CLIP 2" LONG	6063-T6	AT ANCHOR LOCATIONS	Ø 8 € 8 8
12	FWS-018	2/ VENT	VENT LATCH	6063-T6	AT 10-1/2" FROM ENDS	84 D D P 0
12A	_	2/ VENT	CAM TYPE SWEEP LOCK	ZAMAK	AT 13-7/8" FROM ENDS	AL-FAROOQ C ENGINEERS & PRODU 9360 SUNSET DRIVE, MIAMI, FLORIDA 331. TEL. (305) 264-8100
13	14-6010	1/ LATCH	VENT LATCH SPRING	ST. STEEL		A H S H S H S H S H S H S H S H S H S H
14	RH-2500	2/ VENT	ROLLER HOUSING & GUIDE	PLASTIC	M&M PLASTICS	-FA
17	FWS-075	AS REQD.	BAFFLE	NYLON	M&M PLASTICS	AL-F/ ENGINE 9360 SI MIAMI, I
18	#8 X 1-1/4"	AS REQD.	FRAME/VENT ASSEMBLY SCREWS	CRS	P.H. SMS	3002
19	#8 X 3"	2/ VENT	FIX. RAIL SILL SCREWS (SILL END)	CRS	P.H. SMS	
20	_	AS REQD.	GLAZING GASKET	VINYL	_	ORP.
21	E-205	AS REQD.	BULB W'STRIPPING	FLEX PVC		
22	W23211NG	AS REQD.	WOOLPILE W'STRIPPING	_	ULTRAFAB OR EQUIV.	MDW 05
23	_	AS REQD.	SETTING BLOCKS	EPDM	DUROMETER 80±5 SHORE A	MS (
25		1/ VENT	5/16" BOX SCREEN	_	OPTIONAL	STEMS COEE (305) 805-1
					RODUCT RENEWED complying with the Florida	SERIES FWS-300 ALUM HORIZ. S FLORIDA WINDOW SYS 7191 N.W. 77 TERRACE MEDLEY, FL. 33166 TEL. (305) 805-9420 FAX

PRODUCT RENEWED
as complying with the Florida
Building Code NOA-No. 24-0417.02


Expiration Date: 05/01/2025

By: Manuel Peres Miami-Dade Product Control

PRODUCT REVISED As complying with the Florida Building Code NOA-No.

Expiration Date: 05/01/2024

By: Manuel Perez Miami-Dade Product Control




revisions:	ate by description	C 12.30.15 REV. PER RER COMMENTS	D 01.16.18 UPDATED TO 2017 FBC	E 11.05.20 UPDATED TO 2020 FBC	13.23 NO CHANGE THIS SHEET	
revis	no date	C 12	D 01	E 11	F 07.13.23	
date: 10-15-07				dr. by: TARIQ))(ah:
date	$\ $	scale	l	<u>م</u> .	JL:	cnk. by:


drawing no.


W07-80

sheet 6 of 7


JUL 19 2013

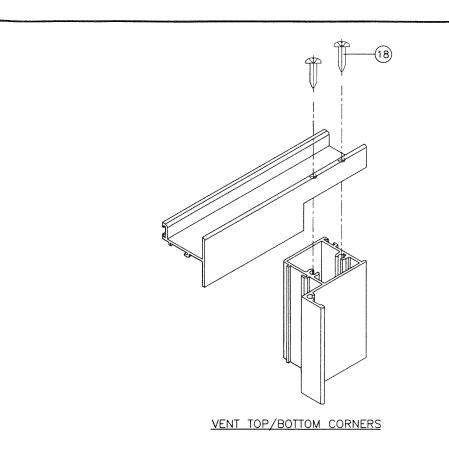

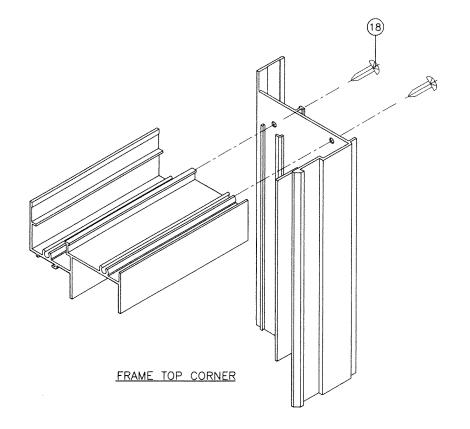

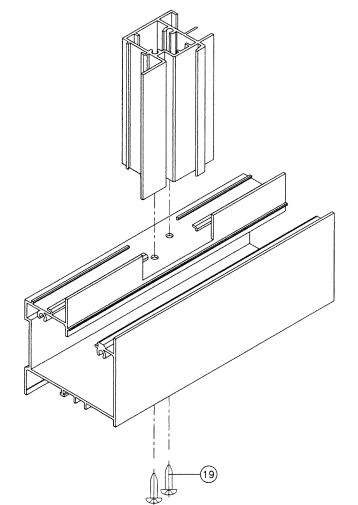

FIXED MTG. RAIL CORNER

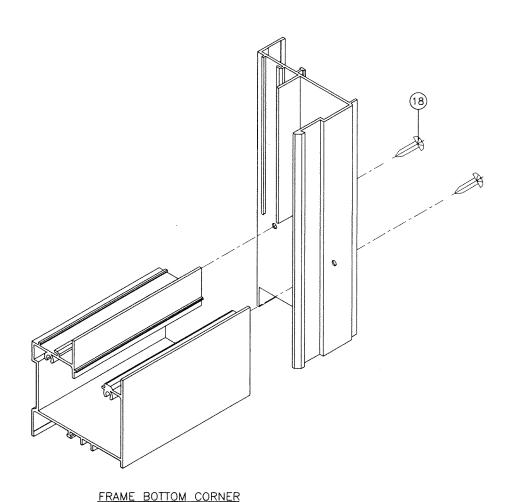

JUL 19 2003

DA WINDOW SYSTEMS CORP.

N.W. 77 TERRACE

Y, FL. 33166

5) 805-9420 FAV 7

PRODUCT RENEWED
as complying with the Florida
Building Code
NOA-No. 24-0417.02

Expiration Date: 05/01/2025

By: Manuel Pres


Miami-Dade Product Control

PRODUCT REVISED
As complying with the Florida
Building Code
NOA-No. 23-0928.27

Expiration Date: 05/01/2024

By: Manuel Perez

Miami-Dade Product Control



drawing no. W07-80

sheet 7 of 7

revisions:
no date
c 12.30.15
D 01.16.18
E 11.05.20
F 07.13.23

 AL-FAROOQ CORPORATION

 ENGINEERS & PRODUCT DEVELOPMENT

 9360 SUNSET DRIVE, SUITE 220

 MIAMI, FLORIDA 33173 (C.A.N. 3538)

 TEL. (305) 264-8100 FAX. (305) 262-6978